

AUGUST®

User Manual

EP750



**August International Ltd
United Kingdom**

Tel: +44 (0)845 250 0586

www.augustint.com

- EN** Active Noise Cancelling Bluetooth Headphones
- FR** Casque Bluetooth à Réduction de Bruit Active
- DE** Aktive Noise Cancelling Bluetooth Kopfhörer
- IT** Cuffie Bluetooth con Cancellazione Attiva del Rumore
- ES** Auriculares Bluetooth con Cancelación de Ruido Activa

User Manual

Thank you for purchasing the EP750 Active Noise Cancelling Bluetooth Headphones. This user manual is designed to familiarize you with all the features of this device. Please take the time to read this user manual carefully, even if you are already familiar with a similar product.

Safety

To ensure the safety of yourself and others, please read the Safety Instructions before using this device. Please do not disassemble the EP750 as it can be unsafe and will invalidate the manufacturer's warranty.

Disposal

Please ensure the product and accessories are disposed of in compliance with the WEEE (Waste Electrical and Electronic Equipment) Directive and any other regulations applicable to your country. Always check with the environment agency and any other relevant authorities for current disposal regulations.

Declaration of Conformity







The Declaration of Conformity can be found on our website at <http://augustint.com/en/declaration/>

Customer Service

You can contact us by phone on: +44 (0)845 250 0586 or by email at: service@augustint.com should you require further technical support or customer service.



1. Safety Instructions

■ Storage and Use

	<p>Do not store or use this device in extreme temperatures.</p>		<p>Do not store or use this device in wet or damp environments.</p>
	<p>Do not expose this device to dust, oil or smoke.</p>		<p>Do not drop or strike this device.</p>
	<p>When transporting this device, store securely to avoid impact damage.</p>		<p>Do not scratch this device with sharp objects.</p>

■ Maintenance

Please unplug all leads before cleaning this device.

	<p>Wipe the device and buttons with a soft cloth.</p>		<p>Never wipe this device with an abrasive cloth or apply detergent, alcohol or chemical based cleaning products.</p>
--	---	---	---

■ Warning:

1. Listening to headphones or earphones at high volume for prolonged periods can cause damage to your hearing.
2. Please be considerate to others and listen at a low volume while in public.
3. If you are experiencing tinnitus, stop using headphones or listen only at a very low volume.

2. Main Features

- Wireless Headphones for Bluetooth Devices
- Active Background Noise Reduction
- Music-Sharing and Receiver Feature
- Integrated Microphone for Hands Free Calling
- Multipoint Technology to Connect to Two Devices

3. Box Contents

 <p>EP750</p>	 <p>Power Cable</p>	 <p>3.5mm Audio Cable</p>	 <p>Audio Splitter Cable</p>
 <p>Airplane Headphone Socket Adaptor</p>	 <p>Audio Cable with In-Line Remote</p>	 <p>User Manual</p>	 <p>Carry Case</p>

4. Part Names and Functions

4.1 Device Layout



4.2 Status LED Meaning

Indication	LED Status
Powered / Reconnection Mode	Flashing red
Pairing	Flashing red and blue alternately
Paired	Flashing blue
Low Battery	Flashing red
Charging	Red
Fully Charged	Blue


5. Operation

Please fully charge the EP750 before first use or if left unused for a long period of time.

To charge, use the power cable to connect the headphones to a powered USB port.

While charging, the status LED will light red. It will turn blue when fully charged.


5.1 Switch On / Off

To switch on the EP750, press and hold  for 2 seconds. The EP750 will enter reconnection mode and the status LED will flash red.

To switch off the EP750, press and hold  for 3 seconds.

5.2 Bluetooth Connections

When switched on, the EP750 will enter reconnection mode and will automatically connect to any previously known device.

To pair to a new device, turn off the EP750 and switch it back on by pressing and holding  for 5 seconds to enter pairing mode. In pairing mode, the status LED will flash red and blue alternately.

- For mobile phones and tablets





1. Scan for available Bluetooth devices on your mobile phone or tablet.
(Please consult your device's user manual if necessary)
2. Select 'EP750' from the available devices and confirm the connection. If a pin code is requested, please enter the code '0000'
3. Once successfully connected, the status LED will flash blue .

- For computers

1. Enable the Bluetooth function on your computer.
2. Select 'Devices and Printers' from the Control Panel and click 'Add a Device'.
3. Select 'EP750' from the available devices. The system will automatically install the driver. If a pin code is requested, please enter the code '0000'.
4. Once successfully paired and connected, the status LED will flash blue.

- Multipoint

The Multipoint technology allows you to connect your EP750 headphones to two source devices at the same time. To create a multipoint connection:

1. Press and hold  to put the EP750 into pairing mode
2. Pair the headphones to your first source device
3. Switch off the headphones.
4. Press and hold  to put the EP750 into pairing mode again.
5. Pair the headphones to your second source device
6. Press  and  simultaneously to activate multipoint
7. Use the Bluetooth menu on your first source device to reconnect to the headphones

To switch between source devices, pause the music on the currently playing device then play music on the second device. Switching devices can take up to 10 seconds.

Note: When receiving a call on either source device, the music will automatically pause and resume once the call is finished.

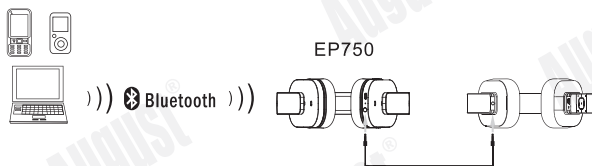
5.3 Active Noise Cancelling

Use the ANC switch to turn on / off the background active noise cancelling.

The ANC status LED will light blue when ANC is active.

5.4 Audio-Out

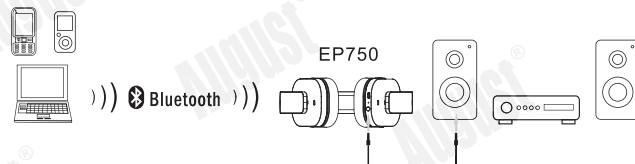
- Music Sharing



When the EP750 is paired to an audio source device, a second pair of headphones can be connected by using a 3.5mm audio connection.

The audio will therefore be played on the EP750 and the second device simultaneously.

- Bluetooth Receiver



When the EP750 is paired to a source device and connected to a speaker system's audio-in socket, the headphones will have the role of a receiver and any music transmitted to them will be reproduced on the speaker system to which it is connected.

5.5 Audio-In

To use the EP750 as a pair of wired headphones, use a 3.5mm audio cable to connect the headphones to your source device.







Note: in order to use the headphones in wired mode, please switch off the EP750. The audio-in requires a minimum level of battery and will therefore not be available when the battery is flat.

To protect the battery or avoid a flat battery, disconnect the audio cable when the EP750 is not in use.

5.6 NFC Connection

1. Enable the Bluetooth and NFC functions on your source device.
2. Switch on the EP750 and enter pairing mode.
3. Touch the NFC area of your source device against the NFC area on the headphones. They will automatically pair with each other.
4. Confirm Bluetooth pairing if prompted. "EP750" will now be listed in your source device's Bluetooth device list.
5. To disconnect your device, touch the NFC area of your device against the NFC area on the speaker. Touch again to reconnect.

5.7 Remote Control

Button	Operation	Function
	Press	Play / Pause; Pick up / Hang up a call
	Press and hold	Power on / Off / Enter Pairing Mode
	Press	Volume Up
	Press and hold	Next track; Reject an incoming call
	Press	Volume Down
	Press and hold	Previous track
 simultaneously	Press	Enable Multipoint

6. Charging

Connect the EP750 to a powered USB port using the provided USB charging cable. While charging, the status LED will light red. It will turn blue once the battery is fully charged. A full charge takes approximately 3 hours depending on power input.

7. Specification

Bluetooth Version	V4.1 with aptX
Bluetooth Distance	10m
Transmission Frequency	2.40GHz-2.48GHz
Support Profile	HSP/HFP/A2DP/AVRCP
Speaker Diameter	Ø40mm
Impedance	32Ω
Speaker Output	20mW x 2
Frequency Response	20Hz-20kHz
Signal and Noise Ratio(SNR)	≥85dB
Distortion	≤1%
Noise Reduction Level	Up to 20dB (at 100–200Hz)
Battery Type	3.7V/ 270mAh Li-polymer Battery
Bluetooth Working Time	About 15 Hours
Bluetooth ANC Working Time	14 Hours
Charging Time	About 3 Hours
Standby Time	540 Hours
Charging Port	Micro USB
Dimensions	200 × 180 × 65mm
Net Weight	255g

8. Troubleshooting

Problem	Solution
Won't turn on.	•Please charge the EP750
Can't find the EP750	•Confirm the EP750 is in pairing status and within 10 meters from the device.
Can't install the driver for EP750 on a computer.	•Update the driver of the Bluetooth module on your computer.
The sound quality is intermittent in Bluetooth mode.	•Disable the Wi-Fi on your source device.
No sound.	•Check the volume on both the source device and the EP750
No sound on the second device.	•Ensure the audio socket used on the second device is audio – in. Ensure the second device is on if required. •Use a standard 3.5mm double Jack audio cable. Using a microphone enabled audio cable may cause problems.
Noise cancelling not working	•Please switch the ANC on. •Please charge the internal battery of the headphones

9. Warranty

This product is guaranteed for twelve months from the date of the original purchase. In the unlikely event of any defect arising due to faulty materials or workmanship, the unit will be either replaced or repaired free of charge (where possible) during this period. An alternative product will be offered in case the product is no longer available or repairable.

This warranty is subject to the following conditions:

- The warranty is only valid within the country where the product is purchased.
- The product must be correctly installed and operated in accordance with the instructions given in this user manual.
- The product must be used solely for domestic purposes.
- The warranty covers only the main units and does not cover the accessories.
- The warranty does not cover the damage caused by misuse, negligence, accident and natural disaster.
- The warranty will be rendered invalid if the product is resold or has been damaged by inexperienced repairs. The manufacturer disclaims any liability for incidental or consequential damages.
- Please consult one of our customer service advisers before returning any product; we are not responsible for any unexpected product returns.
- Any faulty product must be kept and returned in the original packaging with all the accessories and the original copy of the purchase receipt.

The warranty is in addition to, and does not diminish, your statutory or legal rights.

Customer Service:

Telephone: +44 (0) 845 250 0586

Email: service@augustint.com

This product is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. The Declaration of conformity may be consulted online at <http://www.augustint.com/en/declaration>, Rawmec Business Park, Plumpton Road, Hoddesdon, EN11 0EE, United Kingdom.

