

August[®]

User Manual

MS425



August International Ltd

United Kingdom

Tel: +44 (0)845 250 0586

www.augustint.com



- EN** Bluetooth[®] Speaker
- FR** Haut-parleur Bluetooth[®]
- DE** Bluetooth[®] Lautsprecher
- IT** Altoparlante Bluetooth[®]
- ES** Altavoz Bluetooth[®]

User Manual

Thank you for purchasing the August MS425 Bluetooth Speaker. This user manual is designed to familiarize you with all the features of this device. Please take time to read this user manual carefully, even if you are already familiar with a similar product. Please use this speaker at low volume for the first 30 minutes to calibrate its membrane and ensure optimum performance.

Safety

To ensure your safety and the safety of others, please ensure you read the Safety Instructions before using this device. Please do not open the MS425 by yourself. It can be unsafe and will invalidate the manufacturer warranty.

Disposal

Please ensure the product and accessories are disposed in compliance with WEEE (Waste Electrical and Electronic Equipment) Directive and other regulations in your country. Always check with the environmental agency and relevant authority for disposal regulations.

Declaration of Conformity







The Declaration of Conformity can be found on our website at <http://augustint.com/en/declaration/>

Customer Service

You can contact: +44 (0) 845 250 0586 or email service@augustint.com should you require technical support and customer service.

1. Safety Instructions

■ Storage and Use

	Keep this device away from extreme temperatures.		Keep the device away from wet or damp environment.
	Never expose the device to moisture, dust, oil or smoke.		Avoid dropping or exposing to impacts.
	When carrying this device as part of your luggage please ensure it is securely stored to avoid impact damage.		Never strike or scratch this device with any sharp object.

■ Maintenance

Please unplug all leads before cleaning this device.

	Wipe the device and buttons with a soft cloth.		Never wipe this device with an abrasive cloth or apply detergent, alcohol or chemical based cleaning products.
---	--	---	--

2. Main Features


- Wireless speaker for Bluetooth devices
- Standard 3.5mm audio-in socket
- Hands-free calls with microphone
- Built-in rechargeable battery
- Distance: up to 10m (Class II)
- Version: Bluetooth V4.1

3. Box Contents



- 1) Bluetooth Speaker
- 2) USB charging cable
- 3) 3.5mm audio cable
- 4) User manual


4. Part Names and Functions

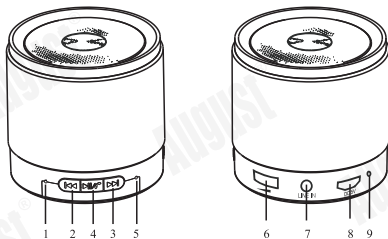

- | | |
|---|---|
| 1) Microphone | 6) Volume Control |
| 2) Previous Track | 7) Line In |
| 3) Next Track | 8) Power Socket |
| 4) Play/Pause/Answer | 9) Charging LED |
| 5) Status LED (blue in Bluetooth mode; red in Line-In mode) | 10) Power Button (Press and hold to turn the device off or on.) |

5. Bluetooth Connection


5.1 Connect to a Mobile Phone

- 1) Press and hold the Power button to switch the device on, the speaker will enter pairing mode and the status LED will flash blue quickly.
- 2) Turn on your mobile phone and scan for Bluetooth devices. "MS425" will be found. Select "MS425" to pair your mobile phone with the device and confirm connection. (Code: 0000)
- 3) When successfully connected, the status LED will light blue once every 4 seconds.
- 4) The MS425 automatically attempts to reconnect to the last paired device after it is switched on. To disconnect and pair the MS425 with a new device, press and hold  for 2 seconds to force the MS425 into pairing mode.

Note:

Accessing Bluetooth settings on mobile phones varies for each phone, to find the information for your phone, please refer to its user manual.

5.2 Connect to a Computer

- 1) Press and hold the Power button to switch the device on, the speaker will enter pairing mode and the status LED will flash blue quickly.
- 2) Enable the Bluetooth function on your computer. Select “Devices and Printers” from the Control Panel and click “Add a device” to start scanning for new devices. After the scan finishes, “MS425” will appear in the results.
- 3) Double click the “MS425” icon to connect to the speaker. The system will install the MS425 driver automatically. (Code: 0000)
- 4) When successfully connected, the status LED will light blue once every 4 seconds.
- 5) To output sound from your computer to the MS425, select “Sound” from the Control Panel; then select the MS425 and click “Set Default”. All sound from your computer will now be played by the MS425.
- 6) The MS425 automatically attempts to reconnect to the last paired device after it is switched on. To disconnect and pair the MS425 with a new device, press and hold  for 2 seconds to force the MS425 into pairing mode.

6. Music Playing Control

The MS425 is able to control the music playing on either a mobile phone or a computer with a Bluetooth connection.



Use Volume Control on the MS425 to adjust volume.

Press  or  to select the previous or next track and press  to play/pause/resume.

Note:

These functions depend on the music player on your mobile phone or computer.

7. Hands-free Calling

Whilst connected to your mobile phone, the MS425 will act as a hands-free system for any calls. Press  on the MS425 to pick up or hang up calls. Press and hold  for 2 seconds to reject the incoming call.

8. Line In

Plug the 3.5mm audio cable into the Line In socket. The MS425 will enter Line In mode automatically. In Line In mode, the status LED is a solid red.

Removing the audio cable will return the MS425 to Bluetooth mode automatically.

9. Charging

When the power is low, the MS425 gives a warning beep every 20 seconds.

To charge the MS425, connect the micro USB lead to the device's power socket, and the other end of the USB cable to a powered USB port.

The charging LED lights red whilst charging and turns off once the battery is fully charged.

10. Specification

Speaker	4Ohm, 3Watt
Frequency Response	90Hz-16KHz
Sensitivity	80dB±2dB
SNR	≥85dB
Distortion	≤0.3%
Power Input	DC 5V 300mA
Built-in Battery	3.7V 600mAh Li-ion Battery
Charging Time	3.5 hours
Working Time	5 hours
Bluetooth Version	Bluetooth V4.1
Working Distance	Up to 10m (Class II)
Dimension	61x60x58mm
Weight	236g

11. Troubleshooting

Problem	Solution
Won't turn on.	Please charge the MS425.
Can't find the MS425.	Confirm the MS425 is in searching mode and within 10 meters from the device.
No sound.	Check the volume on both the source device and the MS425.

■ Warranty

This product is guaranteed for twelve months from the date of the original purchase. In the unlikely event of any defect arising due to faulty materials or workmanship, the unit will be either replaced or repaired free of charge (where possible) during this period. An alternative product will be offered in case the product is no longer available or repairable.

This warranty is subject to the following conditions:

- The warranty is only valid within the country where the product is purchased.
- The product must be correctly installed and operated in accordance to the instructions given in this user manual.
- The product must be used solely for domestic purposes.
- The warranty only covers the main unit, and does not cover the accessories.
- The warranty does not cover the damage caused by misuse, negligence, accident and natural disaster.
- The warranty will be rendered invalid if the product is resold or has been damaged by inexperienced repairs. The manufacturer disclaims any liability for incidental or consequential damages.
- Please consult our customer adviser before returning any product; we are not responsible for any unexpected product returns.
- Any faulty product must be kept and returned in the original packaging with all the accessories and the original copy of the purchase receipt.

The warranty is in addition to, and does not diminish, your statutory or legal rights.

Customer Service:

Telephone: +44 (0) 845 250 0586

Email: service@augustint.com

This product is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. The Declaration of conformity may be consulted online at <http://www.augustint.com/en/declaration>.



Industry Canada Statement

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept interference, including interference that may cause undesired operation of the device.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

No Unauthorized Modifications: Do not make any changes or modifications to this product without the prior express written approval of August International Ltd. Any changes or modifications made without express written approval could void the user's authority to operate this product.



For details of further relevant technical standards, please contact us at the address above.